

^{qbo}minimal LD

qbo



27W

(700mA)

3000k

CRI80 / CRI90

10° / 24°

PROYECTOR LED / LED SPOTLIGHT

qbo

minimal LD



minimal LD



qbo

Proyector LED completamente orientable. Preparado para conectar a carril trifásico. Cuerpo fabricado en aluminio inyectado con acabado en blanco, aluminio o negro. Otros acabados disponibles bajo pedido. Equipo de clase II incluido.

LED spotlight completely orientable ready to connect to a three-phase track. Made of injected aluminium finished in white or black. Other finishings available under request. Class II driver included.

LED CONFIG	%k	lm	lm/w	SDCM
27W 700mA CRI80	3000	3196	118	<3
27W 700mA CRI90	3000	2290	85	<3

00 Blanco / White 09 Negro / Black 01 Aluminio / Aluminium

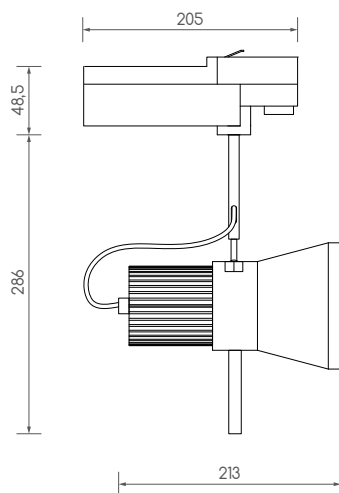

minimal LD

qbo

Codigos / Codes

COD.	DESC.
MINLD30108000	MINIMAL LED 27W 3000K 10° RA80 WHITE
MINLD30248000	MINIMAL LED 27W 3000K 24° RA80 WHITE
MINLD30109000	MINIMAL LED 27W 3000K 10° RA90 WHITE
MINLD30249000	MINIMAL LED 27W 3000K 24° RA90 WHITE

COD.	DESC.
MINLD30108009	MINIMAL LED 27W 3000K 10° RA80 BLACK
MINLD30248009	MINIMAL LED 27W 3000K 24° RA80 BLACK
MINLD30109009	MINIMAL LED 27W 3000K 10° RA90 BLACK
MINLD30249009	MINIMAL LED 27W 3000K 24° RA90 BLACK

COD.	DESC.
MINLD30108001	MINIMAL LED 27W 3000K 10° RA80 ALUMINIUM
MINLD30248001	MINIMAL LED 27W 3000K 24° RA80 ALUMINIUM
MINLD30109001	MINIMAL LED 27W 3000K 10° RA90 ALUMINIUM
MINLD30249001	MINIMAL LED 27W 3000K 24° RA90 ALUMINIUM

(*) Otras temperaturas de color y acabados disponibles bajo pedido.
Other color temperatures and finishes available on request.



