


qbo[®] drivers

led driver 24V IP67

qbo

- LED Driver de tensión constante
- Rango de tensión de entrada universal
- Tensión de salida constante
- Conexión: cable con punteras (longitud aprox. 500 mm)
- Identificación de la polaridad secundario: + rojo / - negro
- Envoltorio metálico, sellado
- Vida útil nominal de hasta 50.000 h (a una ta de 50 °C y una tasa de fallo de ≤ 0,2 % por 1.000 h)
- 5 años de garantía
- Apto para instalaciones de iluminación de emergencia conforme a la norma EN 50172
- Cumple la clase C en todo el rango de carga conforme a EN 61000-3-2
- *Constant voltage LED Driver*
- *Universal input voltage range*
- *Constant output voltage*
- *Connection: Cable with end sleeves (length approx. 500 mm)*
- *Polarity identifiers, secondary + red / - black*
- *Metal casing, encapsulated*
- *Nominal life-time up to 50,000 h (at ta 50 °C with a failure rate max. 0.2 % per 1,000 h)*
- *5-year guarantee*
- *Suitable for emergency installations according to EN 50172*
- *Complies with CLASS C from minimum to maximum load range according to EN 61000-3-2*

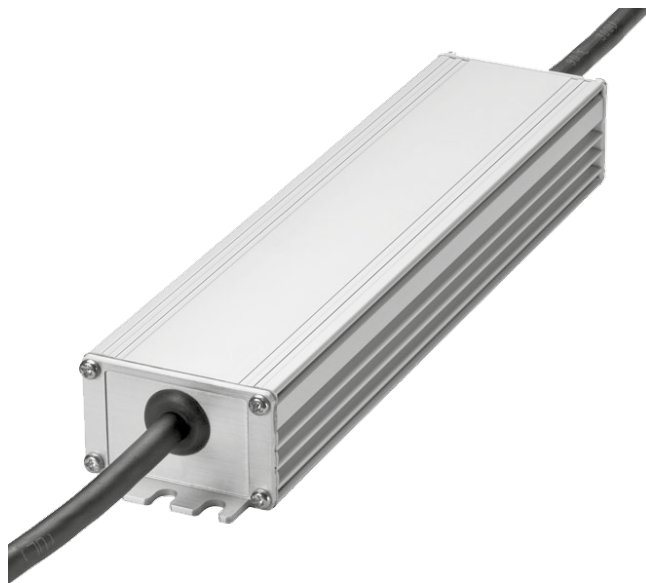

SELV                        

